




- Excellent Noise Suppression
- Abrasion Resistant
- Extremely Lightweight
- Attractive Appearance
- Does Not Trap Heat Or Moisture

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
1/8"	NRN0.13BK	1/8"	3/16"	500'	100'	Black	0.3
1/4"	NRN0.25BK	1/4"	3/8"	500'	100'	Black	0.5
3/8"	NRN0.38BK	3/8"	1/2"	250'	100'	Black	0.9
1/2"	NRN0.50BK	1/2"	3/4"	250'	100'	Black	1.1
5/8"	NRN0.63BK	5/8"	1"	250'	100'	Black	1.5
3/4"	NRN0.75BK	3/4"	1 1/4"	250'	75'	Black	2.0
1"	NRN1.00BK	1"	1 5/8"	250'	50'	Black	2.4

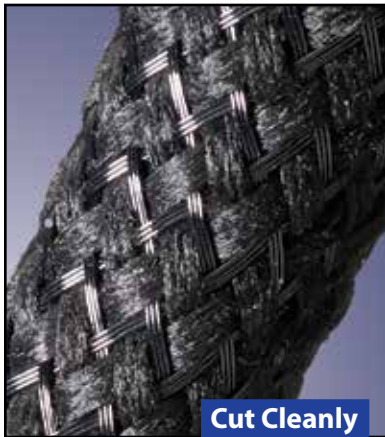

Cut Cleanly  
Hot Knife


### Self-Fitting Protective Oversleeve

Flexo Noise Reduction (NR) is a biaxially braided sleeving combining monofilament and multifilament PET yarns to create a full coverage expandable sleeve that substantially reduces noise on wires, tubes and hoses. The lightweight, rugged construction also provides protection from abrasion and vibration that is far superior to foam harness sleeves. NR expands for easy installation over splices and connectors and is flexible enough for tight radius applications.

NR is used in body wiring harnesses, instrument panel and lighting wiring, cable and hose assemblies, and other limited access applications where noise reduction is desirable.

Colors Available:


Black (BK)

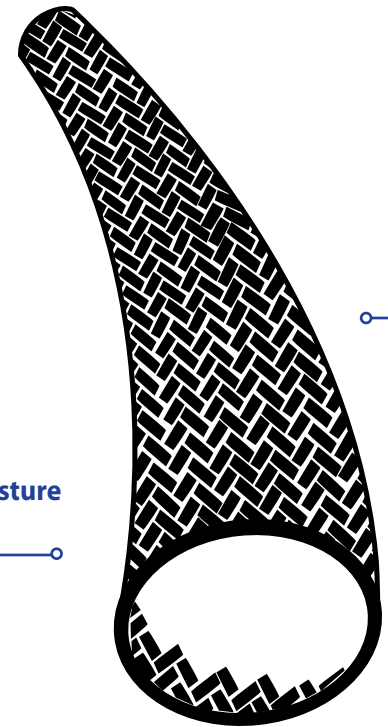

The braided construction will not hold moisture and drains quickly when immersed.

<b>Material</b>	Polyethylene Terephthalate
<b>Grade</b>	NRN
<b>Wall Thickness</b>	.025"



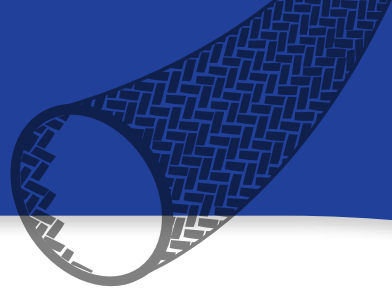

## FLAMMABILITY

Rating \_\_\_\_\_ \*UL94  
\*UL 94 V-O Raw Material

## ABRASION

**Abrasion Resistance**  
**Medium**

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

## CHEMICAL RESISTANCE


1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Keytones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

**Melt Point**  
ASTM D-2117  
**446°F (230°C)**

**Maximum Continuous**  
Mil-I-23053  
**257°F (125°C)**

**Minimum Continuous**  
**-22°F (-30°C)**

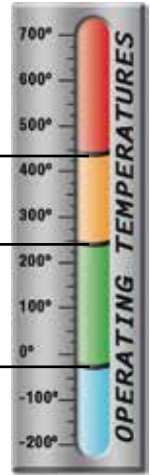

## PHYSICAL PROPERTIES

Monofilament Diameter \_\_\_\_\_ .010  
ASTM D-204  
Flammability Rating \_\_\_\_\_ \*UL94  
\*UL 94 V-O Raw Material  
Recommended Cutting \_\_\_\_\_ Scissor/HK  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .025  
Tensile Strength (Yarn) \_\_\_\_\_ 7.5  
ASTM D-2256 Lbs  
Specific Gravity ASTM D-792 \_\_\_\_\_ 1.38  
Moisture Absorption \_\_\_\_\_ .1-.2  
% ASTM D-570  
Hard Vacuum Data \_\_\_\_\_  
ASTM E-595 at 10-5 torr  
TML \_\_\_\_\_ .19  
CVCM \_\_\_\_\_ .00  
WVR \_\_\_\_\_ .16  
Outgassing \_\_\_\_\_ Med  
Oxygen Index \_\_\_\_\_ 21  
ASTM D-2863